


输出端output

Technical drawing of the output end (output) of a pump. The drawing shows a square flange with a central circular feature. Key dimensions and features include:

- Outer square dimension: $\square 42.6$
- Large circular hole diameter: $\phi 56$
- Small circular hole diameter: P.C.D. $\phi 50$
- Chamfer: 45°
- Four small holes: 4- $\phi 3.5$ 贯穿

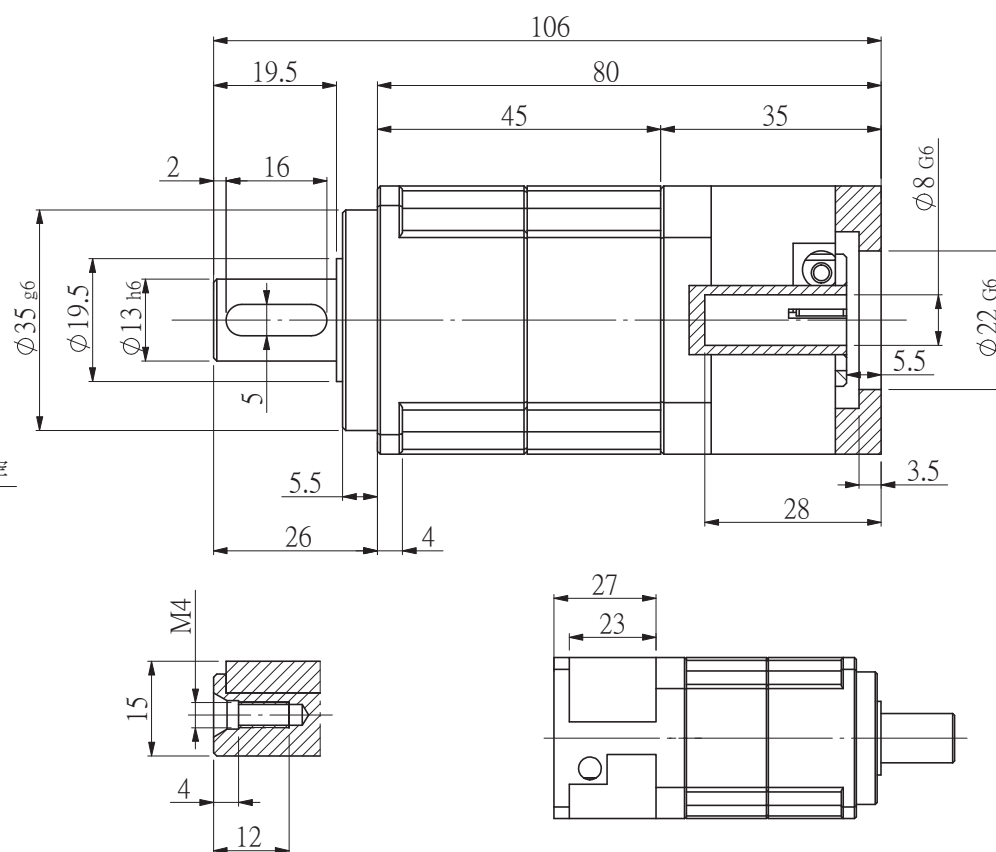

Technical drawing of a square flange with a central circular feature. The drawing includes dimensions: outer square side 42.6, inner circle P.C.D. Ø43.8, and four Ø3.5 holes. A central circular feature has a diameter of Ø56. The drawing is labeled "内六角螺丝 M3x12L" (Internal hex screw M3x12L) and "4-Ø3.5 贯穿" (4-Ø3.5 through).

精密伺服行星星減速機技術參數																DB042-L2			德森傳動設備有限公司	
減速比	15	20	25	30	35	40	50	70	100											
額定輸出力矩	20Nm	19Nm	22Nm	20Nm	19Nm	17Nm	22Nm	19Nm	14Nm											
最大輸出扭矩	2.5倍額定輸出力矩			回程間隙		B2≤12arcmin		標記	處數	分區	更改文件號	簽名	日期	視角			精密伺服行星星減速機			
額定輸入轉速	5000rpm			工作效率		≥94%		設計				標準化				階段標記		重量	比例	Tel/電話：020-84062742 Fax/傳真：020-84433960
最大輸入轉速	10000rpm			工作溫度		-10℃~+90℃		校對							S				1:1	
最大徑向力	780N			防護等級		IP65		審覈											H. DB. 042. 02. 04. 000	
最大軸向力	390N			噪音		≤58dB		工藝				批准			共 1 張			第 1 張		