



输出端output

Technical drawing of the output end of a pump. The drawing shows a square flange with a side length of 42mm. It features a central shaft with a key and a keyway. The shaft has a diameter of 35mm and a length of 50mm. The flange has four mounting holes with a diameter of 3.5mm. The outer diameter of the flange is 56mm. The drawing is labeled "输出端output" (Output end) and includes dimensions: 42, 35, 50, 3.5, 56, and P.C.D. 50.

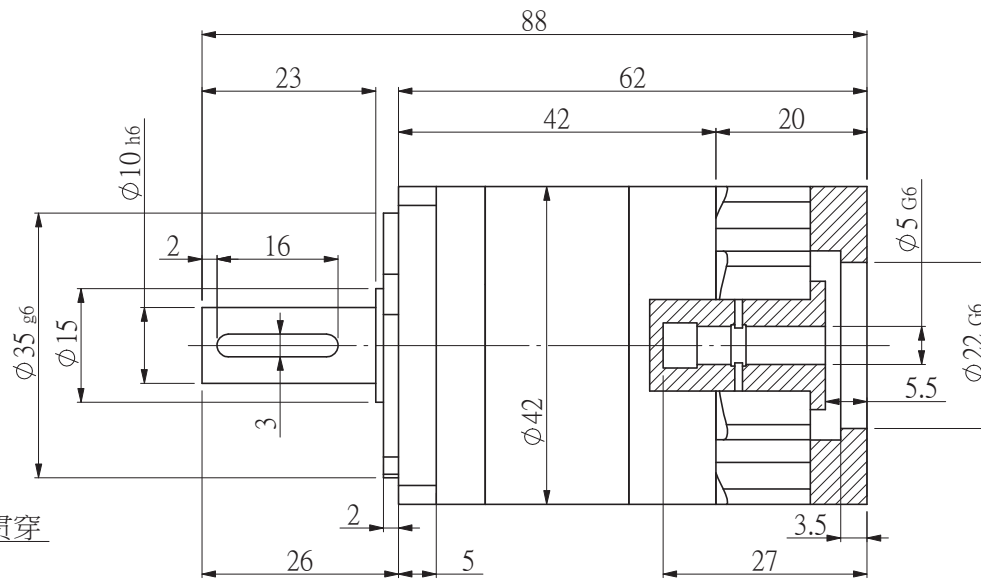

Technical drawing of a square flange with a central hole and four mounting holes. The drawing includes dimensions: outer diameter $\phi 56$, inner diameter P.C.D. $\phi 43.8$, and mounting hole diameter $4-\phi 3.4$ 贯穿. It also shows a 45° chamfer and a specification for internal corner screws: 内六角螺丝 M4x12L.

精密伺服行星減速機技術參數												PF040-L1	 德森傳動設備有限公司		
減速比	3	4	5	7	10										
額定輸出力矩	-	15Nm	14Nm	8Nm	5Nm										
最大輸出扭矩	1.5倍額定輸出力矩		回程間隙		B2≤16arcmin	標記	處數	分區	更改文件號	簽名	日期	視角	 		精密伺服行星減速機
額定輸入轉速	4500rpm		工作效率		≥96%	設計			標準化			階段標記	重量	比例	Tel/電話: 020-84062742 Fax/傳真: 020-84433960
最大輸入轉速	8000rpm		工作溫度		-10℃~+90℃	校對						S		1:1	S. PF. 040. 01. 04. 0002
最大徑向力	165N		防護等級		IP65	審覈									
最大軸向力	135N		噪音		≤56dB	工藝			批准			共 1 張		第 1 張	