
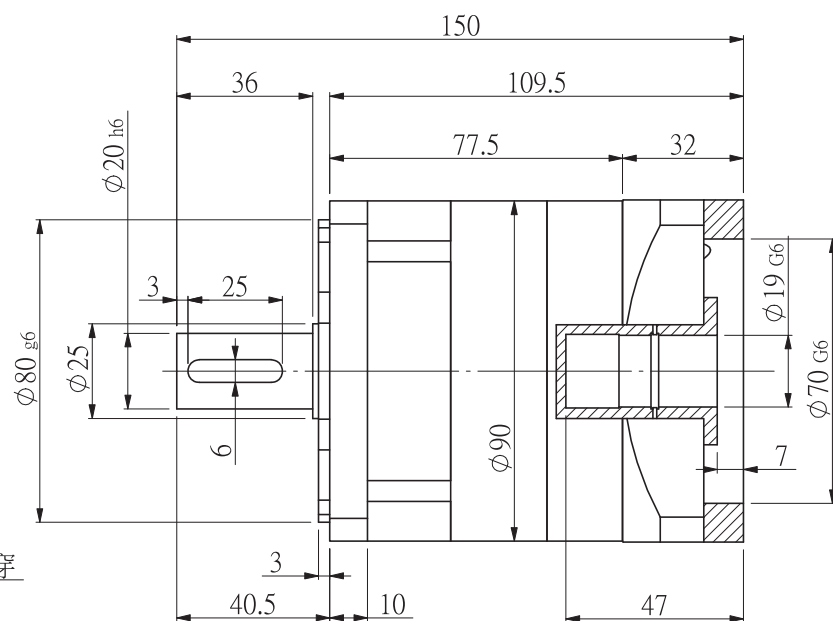


Technical drawing of a cast part (Figure 1-10). The drawing shows a top view of a square flange with rounded corners. The outer square has a side length of 90 mm. The inner circular hole has a diameter of 100 mm (P.C.D. Ø100). There are 8 mounting holes arranged in a circle with a diameter of 119 mm (Ø119). The holes are 4-Ø6.5 through holes. The corners are chamfered at 45 degrees. The drawing is labeled '图 1-10' and '（压铸件尺寸：□91）'.



Technical drawing of the front view of a motor terminal box. The drawing shows a square flange with a width of 91.5mm. The outer diameter of the mounting holes is 119mm. The pitch circle diameter (P.C.D.) of the mounting holes is 90mm. There are four mounting holes, each with a diameter of 4mm and a depth of 12mm. The terminal box is mounted on a base with a 45-degree angle. The terminal box is labeled "内六角螺丝 M6x20L" (Hex screw M6x20L). The drawing is labeled "实物尺寸" (Actual dimensions).

精密伺服行星減速機技術參數													PF090-L1				德森傳動設備有限公司
減速比	3	4	5	7	8	10											
額定輸出力矩	60Nm	120Nm	120Nm	90Nm	90Nm	50Nm											
最大輸出扭矩	1.5倍額定輸出力矩		回程間隙		B2≤10arcmin		標記	處數	分區	更改文件號	簽名	日期	視角			精密伺服行星減速機	
額定輸入轉速	3500rpm		工作效率		≥96%		設計				標準化		階段標記		重量	比例	Tel/電話: 020-84062742
最大輸入轉速	6000rpm		工作溫度		-10℃~+90℃		校對						S			1:1	Fax/傳真: 020-84433960
最大徑向力	450N		防護等級		IP65		審覈										S. PF. 090. 01. 04. 0001
最大軸向力	430N		噪音		≤60dB		工藝				批准				共 1 張	第 1 張	