
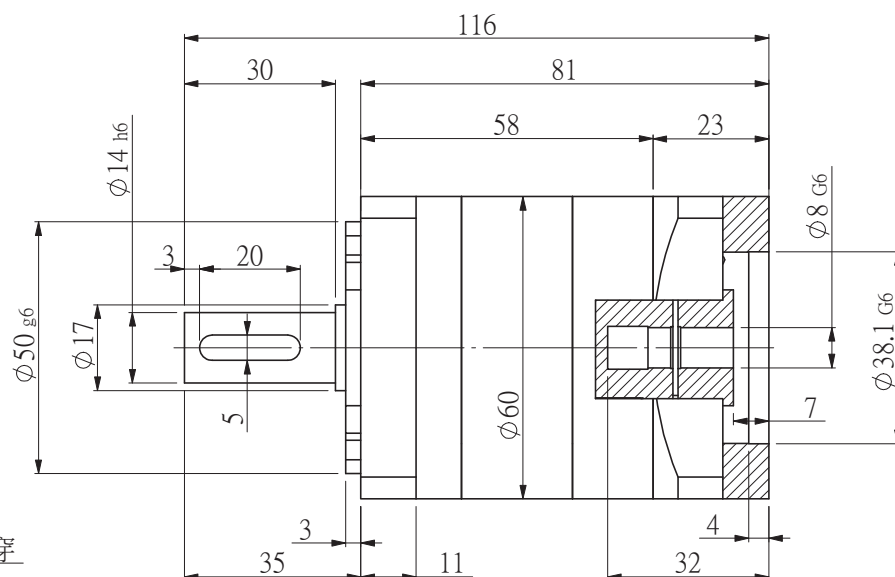


Technical drawing of a square flange with a central hole and eight mounting holes. The drawing includes the following dimensions and features:

- Outer square size: $\square 60$
- Central hole diameter: $\phi 79$
- Mounting hole pitch circle diameter (P.C.D.): $\phi 70$
- Mounting hole diameter: $\phi 5.5$
- Note: 4- $\phi 5.5$ 贯穿 (4 holes are through holes)



Technical drawing of a square flange with a central threaded hole. The drawing includes the following dimensions and specifications:

- Outer square side length: 60
- Central hole diameter: $\phi 79$
- Mounting hole diameter: P.C.D. $\phi 66.7$
- Mounting hole spacing: 45°
- Central hole thread: 内六角螺丝 M5x16L
- Mounting holes: 4-M4 8

精密伺服行星減速機技術參數												PF060-L1				德森傳動設備有限公司	
減速比	3	4	5	7	10												
額定輸出力矩	18Nm	36Nm	40Nm	20Nm	12Nm												
最大輸出扭矩	1.5倍額定輸出力矩		回程間隙		B2≤14arcmin	標記	處數	分區	更改文件號	簽名	日期	視角	 		精密伺服行星減速機		
額定輸入轉速	4000rpm		工作效率		≥96%	設計			標準化			階段標記		重量	比例	Tel/電話: 020-84062742 Fax/傳真: 020-84433960	
最大輸入轉速	8000rpm		工作溫度		-10℃~+90℃	校對						S			1:1		
最大徑向力	240N		防護等級		IP65	審覈											
最大軸向力	220N		噪音		≤58dB	工藝			批准			共 1 張		第 1 張		S.PF. 060. 01. 04. 0003	